


Product Care:

GENERAL PRODUCT CARE:

- Fabric should always be handled in a clean area with clean hands and equipment.
- Be sure fabric is clean and dry before packing.
- Machine washing and/or drying is not recommended for all fabrics or construction. Contact Manufacturer with any questions.
- Roll fabric for storage. Fold inside out or face-in along seams. Do not fold applied or silk-screened graphics. Pack in bag provided.
- Fabric may be ironed on or off the frame. Use permanent press setting and non-waxed, non-inked paper between iron and fabric. Keep iron in constant motion.
- Always pack silk-screened and vinyl graphics with wax-free, ink-free paper or fabric shield to prevent its sticking to another surface.
- The aluminum frame in this product is susceptible to damage if improperly handled, shipped or stored. Use caution when handling and packing to prevent bending and/or crushing the frame.
- Pack in original shipping bags. Pack bags in corrugated cardboard box for shipping. Store product in a cool dry area (40°-80°F).

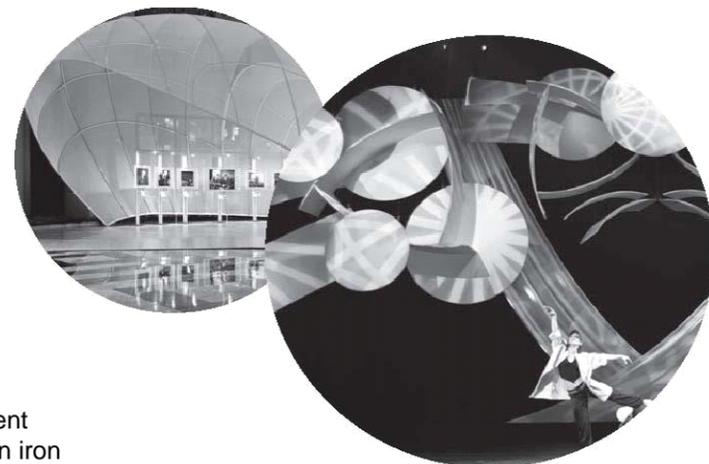

STAIN	BEST CLEANER	ALTERNATIVE SOLUTION
Blood	Shout	Amodex, 3% Hydrogen Peroxide
Loose Dirt	Stiff Brush	Shout, Pre-Spot
Nail Polish	Denatured Alcohol	Acetone
Ink	Tape/Denatured Alcohol	Amodex
Lipstick	Shout	Amodex
Oil, Grease	K2r	Corn Starch & Shout
Pencil	Tape/Denatured Alcohol	Amodex, Pre-spot
Food/Drink	Shout	Contact Manufacturer


NOTE: This information is provided to assist you with the care and maintenance of your product. No expressed or implied warranty is intended. Please contact Manufacturer for details or assistance.

EMERGENCY STAIN TREATMENT:

- Treat stain promptly for best results.
- Identify the stain before you treat it. The guide will assist you with treatment.
- Use masking tape to mark stained area with a box or tag before cleaning.
- If at all possible, remove the cover for cleaning.
- Use extreme care treating stains to avoid more damage.
- Stain removal is more effective when applying treatment from the back of the cover unless there is an attached liner or fabric coating on the back.


TREATMENT:

1. Lift, scrape or blot as much of the staining material off as possible.
2. Tape is effective for lifting dry materials like loose dirt, pencil and some inks.
3. Work from the outside edges toward the center of the stain.
4. Most natural stains may be treated with distilled water. Stretch fabric over an open container or clean white rolled up towel and force water through the back of the stain with a squirt bottle or by blotting with a clean white towel. Repeat procedure until water runs clear.
5. For stains not responsive to water, use the chart shown on this page and follow instructions on cleaner container or call for assistance. Rinse cleaner from fabric using distilled water, blotting from the outside of

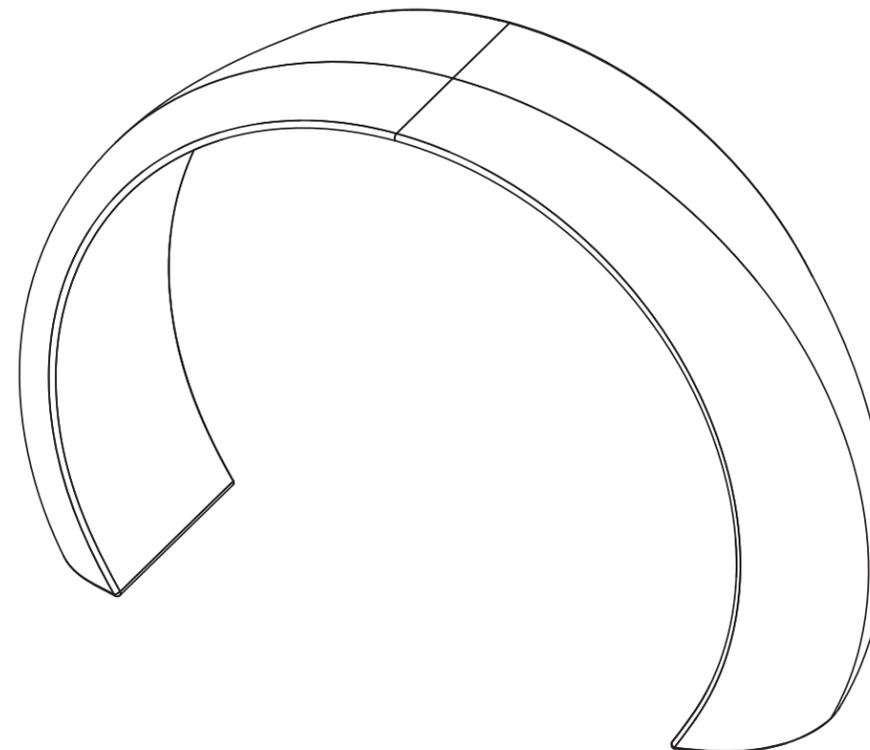





COMMON TROUBLES:

- Wrinkles/Poor Fit - Keep corners of cover aligned over frame corners when installing for smooth fit. Use a hand steamer to remove small wrinkles.
- Difficult to adjust - Cover is easier to adjust when not fully installed. Release and reinsert as necessary.
- Frame is warped - Make sure connectors are aligned and very tight. Frame warp can be easily corrected by laying structure flat face down on the floor and lifting upright from both sides.

PARTS LIST (PER UNIT):	NOTES:	GENERAL INSTRUCTIONS :
(2) Welded bases (2) 257.38" long curved outer bars (1) 139.00" long curved middle bar (2) T-shape bars w/ connection on both ends (1) 35.25" long curved bar w/ connection on both ends		<ul style="list-style-type: none"> • Read and follow all instructions. • Save instructions. • Wipe down all tubing, clean work area and lay out plastic sheeting. • Repack fabric carefully and neatly in the original fabric bag provided. • Repeat packing instructions for frame. <p>WORKMANSHIP GUARANTEE : Manufacturer fully guarantees all exhibits against defects in workmanship. If our products receive proper care, but fail due to a defect in manufacturing, the exhibit will be repaired or replaced at our discretion. Damage to exhibit products caused by accidents, improper care or negligence, where Manufacturer is not at fault (including sun degradation and wear and tear) repairs will be performed for a reasonable fee.</p> <p>WARNING : Hanging system and structure are designed for: (1) indoor use only (2) to hold the weight of the structure and fabric cover only. No other loads should be applied to this display system.</p>
ALSO INCLUDED: Assembly & Cleaning Kit: - Hextool - Gloves - Washcloth - 303 Cleaner - Plastic Dropcloth	TYPICAL LABELING CONNECTION # WORK ORDER # 	

Assembly Instructions:

1. All assembly should be in a clean area. All parts should be kept clean. Fabric cover should be handled carefully to avoid soiling or damaging. Bars should be wiped clean prior to fabric install. Drop cloths should be used when installing fabric.
2. Snap fit together all shock corded pieces in parts list.
3. Assemble outer frame by matching labels on each connection. Frame has been labeled in an alphabetical order for an easier assemble.
4. Create internal support by adding T-shape spacers. Do not disassemble spacers when taking frame apart.
5. Adjust as necessary to form a symmetric structure and firmly tighten all connectors.
6. Locate label "A" on cover & frame and use it as a reference point. Carefully slide cover over frame from point A to B. See drawing for reference. Fabric is under tension and should be adjusted carefully to provide a uniform final surface. Zip on bottom ends. Adjusting cover is most easily done while it is unzipped.
7. Hand steam the fabric cover to remove any small wrinkles.

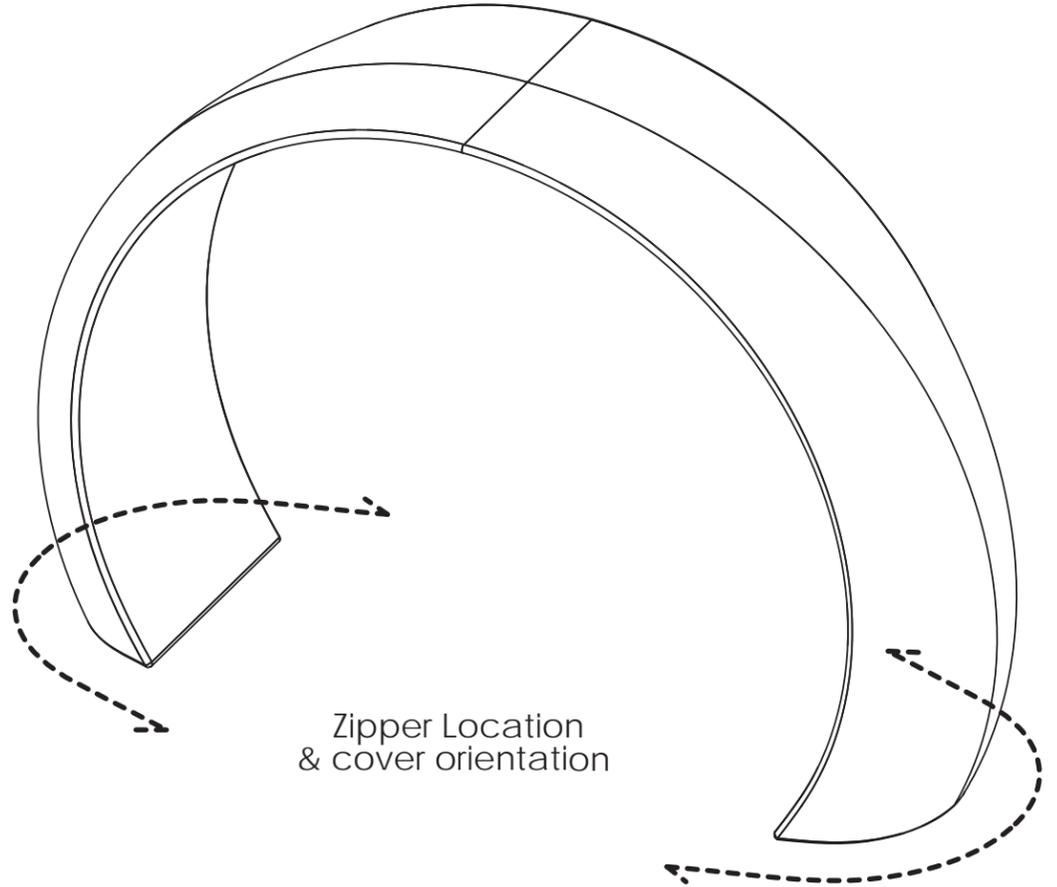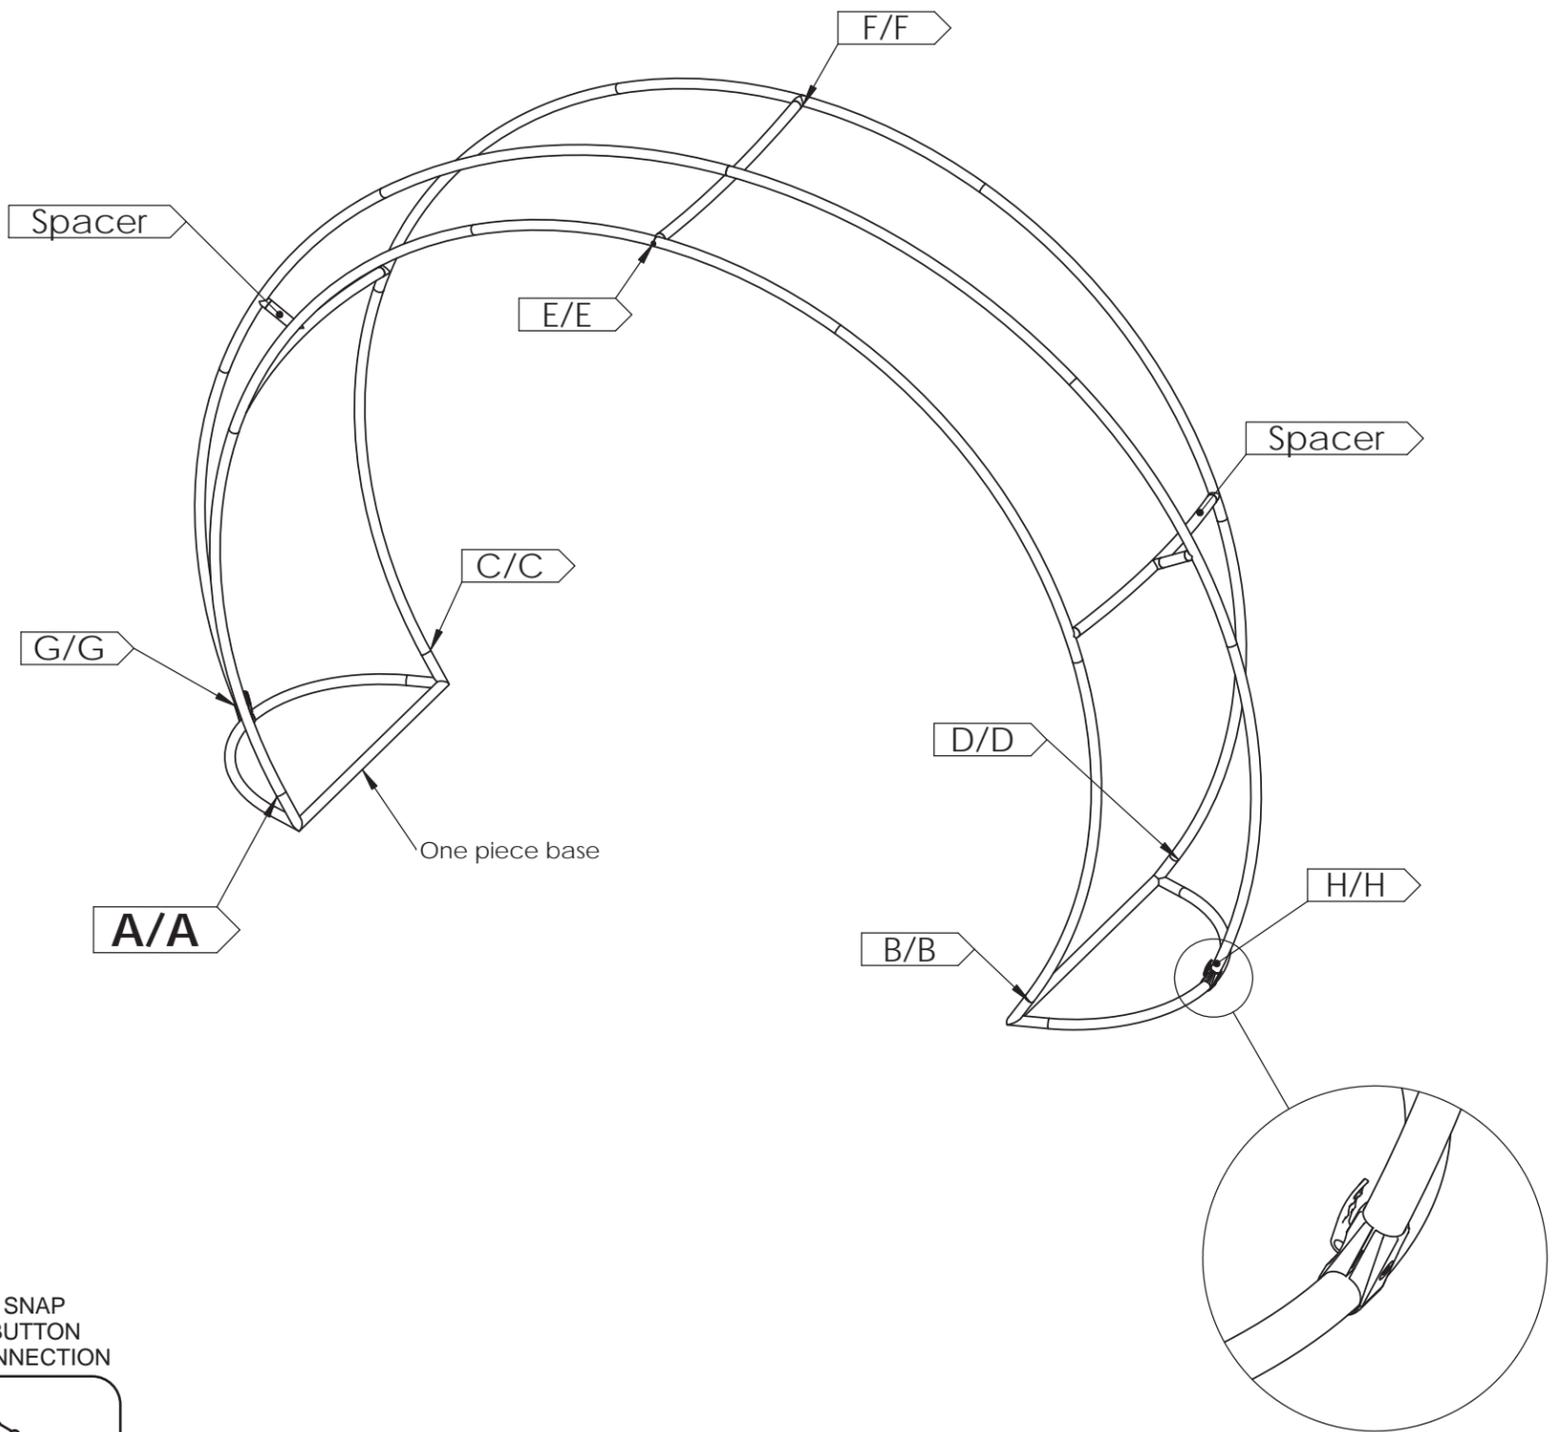

Quick Lock Connector
Twist and press handle
all the way down
to clamp connector

NOTE: Follow alphabetical order for an easier assemble

WARNING: Hanging system and structure are designed For: (1) indoor use only and (2) to hold the weight of the structure and fabric cover only. Each wire cable is proof tested at 500 lbs (250 lbs working load). No other loads should be applied to this display system.

